

USE IT. LIVE IT.

# DN-X120

Professional Mobile/Club Mixer



## Features

- Companion Mixer for DN-S1200
- (2) Line, (2)Phono/Line (switchable)
- Mic Input w/2-Band EQ
- Mic Talkover Switch
- 3 Band EQ w/Full Kill
- VCA, 45mm Crossfader & Channel Faders
- Crossfader Contour
- 4 position Input/Transform Switch
- Split Cue
- Fader Start On/Off for Crossfader & Channel Faders
- TRS Balanced & RCA Unbalanced Outputs
- 10 segments Level Meter
- Simple & Easy operation
- External Power Adaptor

For exceptional sound in a tight package, the Denon DJ DN-X120 is our entry level mixer that maintains Denon's high standards and provides our users with the smallest professional-quality DJ mixer on the market. Ideally matched to, and can be packaged with our DNS700 and DN-S1200 CD/ Media Players.



DISCOVER MORE AT [WWW.DENONDJ.EU](http://WWW.DENONDJ.EU)



DENON DJ

USE IT. LIVE IT.


# DN-X120

Professional Mobile/Club Mixer

## Specifications

- **Phono Inputs:** 2 Stereo Unbalanced RCA jacks  
 Input Impedance 50 k $\Omega$ /kohms  
 Level -50 dBV (3 mV)
- **Line Inputs:** 2 Stereo Unbalanced RCA jacks  
 Input Impedance 20 k $\Omega$ /kohms  
 Level -14 dBV (200 mV)
- **EQ Control (Line):** 3 Bands  
 Control Range HI: -30 dB to +10 dB (at 16 kHz), -38 dB to +10 dB (at 20 kHz)  
 MID: -38 dB to +10 dB (at 1 kHz)  
 LOW: -38 dB to +6 dB (at 60 Hz)
- **Mic Inputs:** 1 Mono Active Balanced 1/4" TRS jack  
 Input Impedance 2 k $\Omega$ /kohms  
 Level -54 dBV (2 mV)  
 Frequency Response 20 Hz to 20 kHz ( $\pm$ 3 dB)  
 S/N 66 dB
- **EQ Control (Mic):** 2 Bands  
 Control Range HI: -12 to +12 dB (at 10 kHz)  
 LOW: -12 to +12 dB (at 100 Hz)
- **Master Output:** Stereo Active Balanced 1/4" TRS jack  
 Balanced Output Impedance 150  $\Omega$ /ohms  
 Level +4 dBm (1.23 Vrms) (600  $\Omega$ /ohms load)  
 Frequency Response 20 Hz to 20 kHz ( $\pm$ 2 dB)  
 THD+N LINE : Below 0.05 %  
 S/N LINE : 85 dB  
 Cross Talk Over 75 dB  
 Unbalanced Stereo Unbalanced RCA jacks  
 Output Impedance 1 k $\Omega$ /kohms  
 Level 0 dBV (1 Vrms) (10 k $\Omega$ /ohms load)  
 Frequency Response 20 Hz to 20 kHz ( $\pm$ 2 dB)  
 THD+N LINE : Below 0.05 %  
 S/N LINE : 85 dB  
 Cross Talk Over 75 dB
- **Headphone Output:** Stereo  
 Output Impedance 33  $\Omega$ /ohms  
 Level 0 dBV (1 Vrms) (32  $\Omega$ /ohms load)
- **Power Source:** AC 10 V 750 mA x 2
- **Power Supply, Consumptions:**  
 USA, Canada AC 120 V  $\pm$  10 %, 60 Hz (AC adaptor : AA-26)  
 Europe, Asia, Oceania AC 230 V  $\pm$  10 %, 50 Hz (AC adaptor : AA-27)
- **Unit Size** 220 (W) x 232 (D) x 82.4 (H) mm
- **Weight** 2.8 kg AC adaptor : 0.5 kg

\* Specifications and design are subject to change without notice for purpose of improvement.

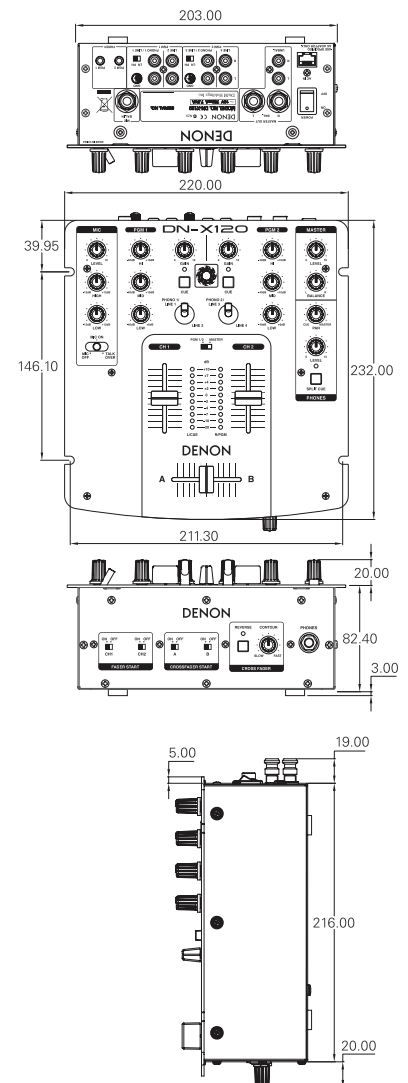

DISCOVER MORE AT [WWW.DENONDJ.EU](http://WWW.DENONDJ.EU)